


GRIP DIAGRAM


KEY-104

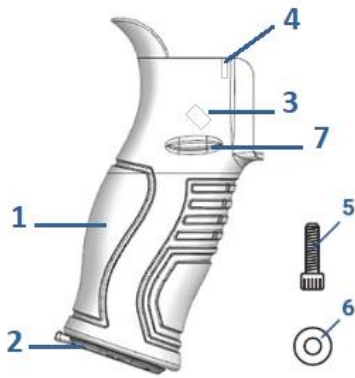


1. The body of the grip
2. The cover/lid of the grip
3. Connector hole/Fastener
4. A hole for the spring
5. The screw of the grip
6. The screw washer of the grip
7. Finger place

How to Install


WARNING: Make sure the firearm is unloaded before installation.




1. Detach the standard grip using a screwdriver.
Attention: When removing the grip, do not lose the safety spring and the detent.



2. Pull the tab and remove the pistol grip cover (2).

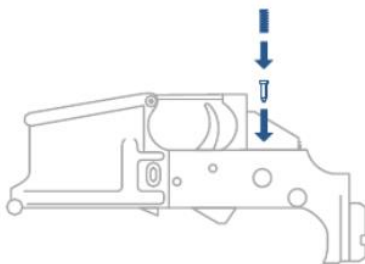

3. Install the safety spring detent and the safety spring into the lower receiver of the carbine.

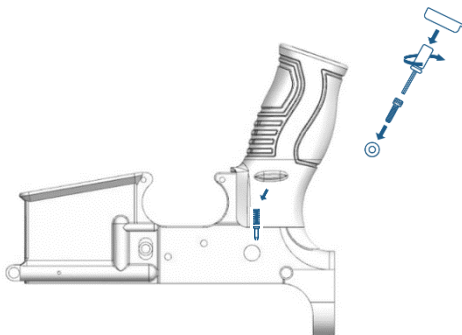

4. Install the pistol grip. Then, slide the washer (6) onto the pistol grip screw (5). Tighten the screw and place the pistol grip cover back in place (2).

KEY-104	Length	Width	Height
Dimensions	7.31 cm	3.58 cm	12.4 cm
Weight	100 gr		

TECHNICAL DIMENSIONS

