


KEY-603

KEY-603 DIAGRAM

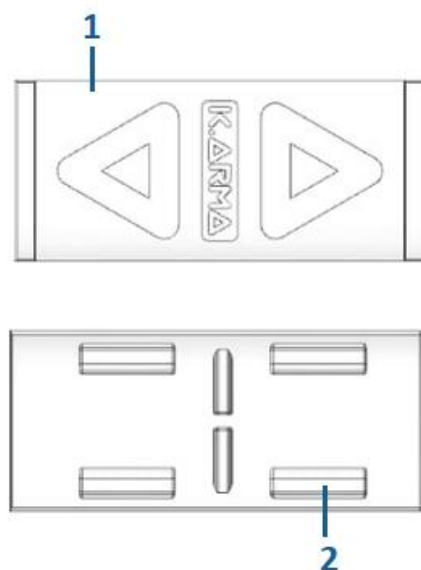


1. Rail cover body
2. Locking latches

How to Install

WARNING: Make sure the firearm is unloaded before installation.

1. Place the locking latches (3) directly onto the Picatinny rail section. Apply downward pressure from the top until the latches securely engage with the rail slots. You should hear or feel a 'click' when they lock into place. To remove it, disengage the latches and lift the cover off. Be careful to avoid damage.

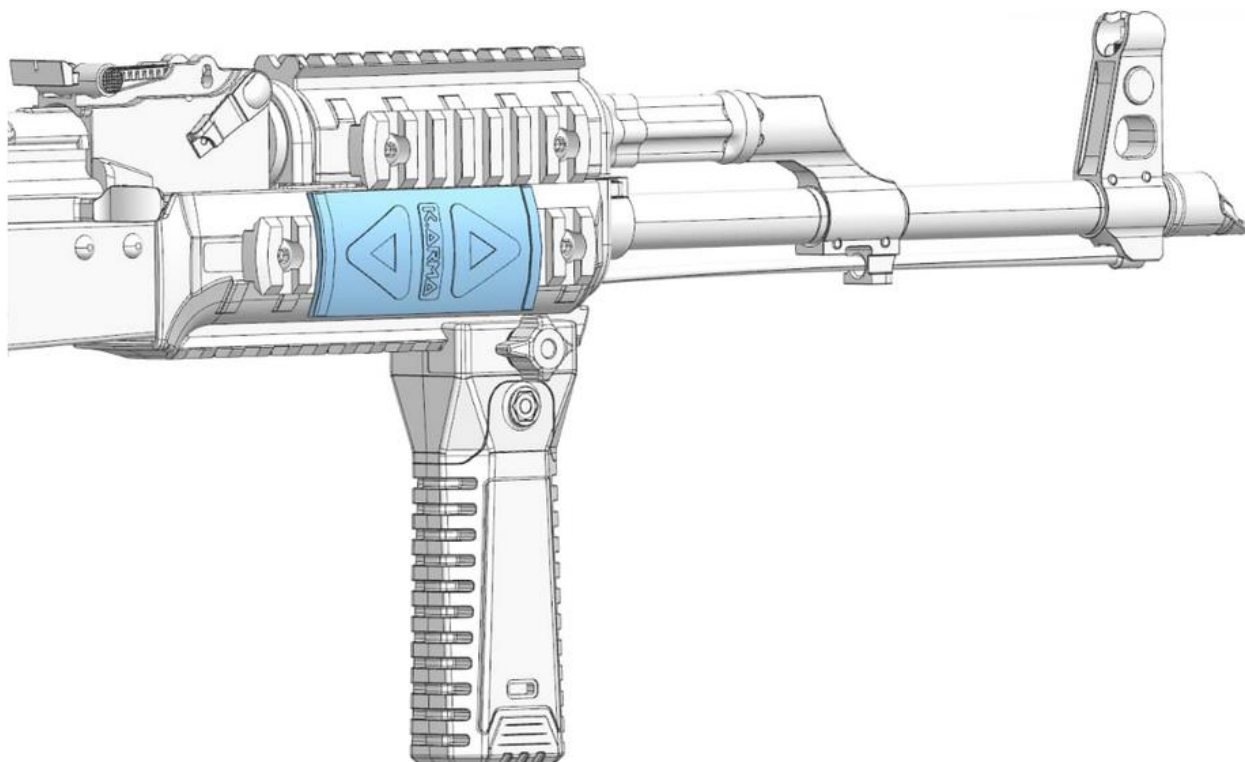

KEY-ARMA

KEY-603	Length	Width	Height
Dimensions	7.75 cm	3.4 cm	11.5 cm
Weight	11 gr		

TECHNICAL DIMENSIONS

