


NEXUS-CP


BUTTSTOCK DIAGRAM

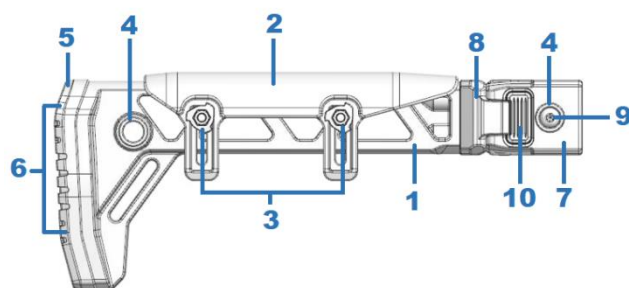


1. Buttstock
2. Cheek riser
3. Cheek riser adjustment knobs
4. QD Cups
5. Buttpad
6. Buttpad mounting screws
7. Front lug of folding adapter
8. Rear lug of folding adapter
9. Mounting screw
10. Adapter folding button

How to Install

WARNING: Make sure the firearm is unloaded before installation.

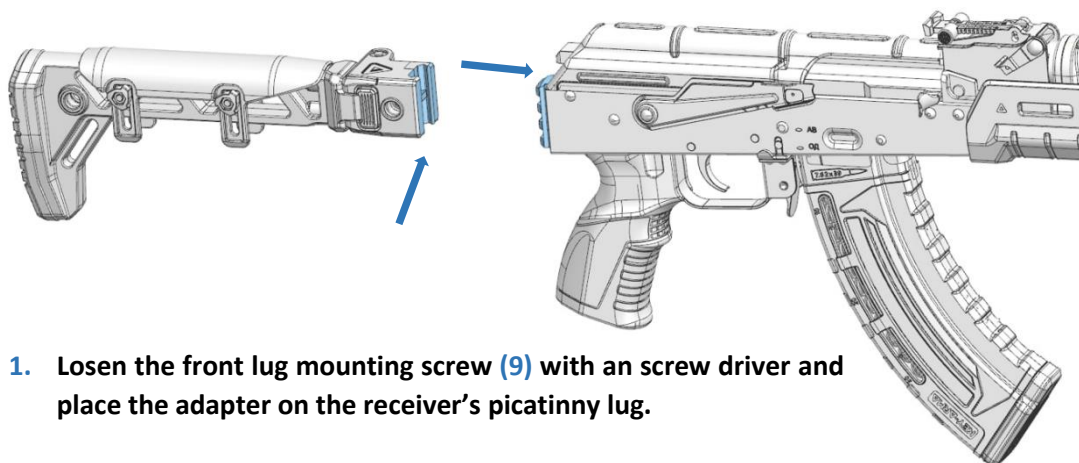



1. Loosen the front lug mounting screw (9) with an screw driver and place the adapter on the receiver's picatinny lug.

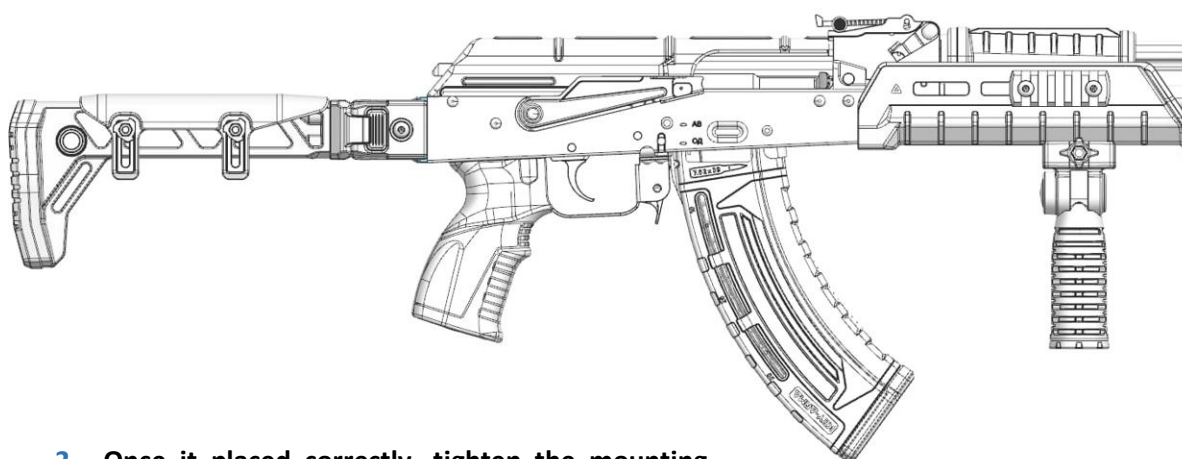

2. Once it placed correctly, tighten the mounting screw (9).


How to change the Folding Direction

1. Press adapter folding button (10) and fold the stock to the left. To change the direction for folding the stock to the right, remove the adapter from the rifle as well as from the buttstock using screw driver. Once the adapter is removed from both receiver and buttstock, rotate the adapter and reinstall it to buttstock and receiver.

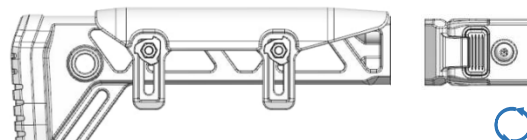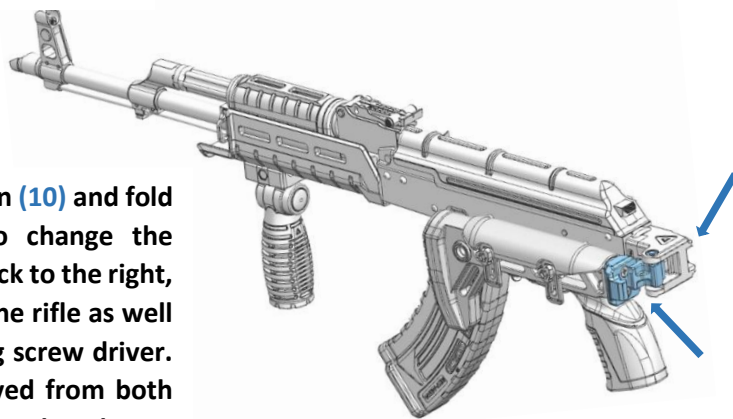

2. Once the adapter is rotated and reinstalled, Press adapter folding button (10) and fold the stock to the right.

How to adjust cheek riser

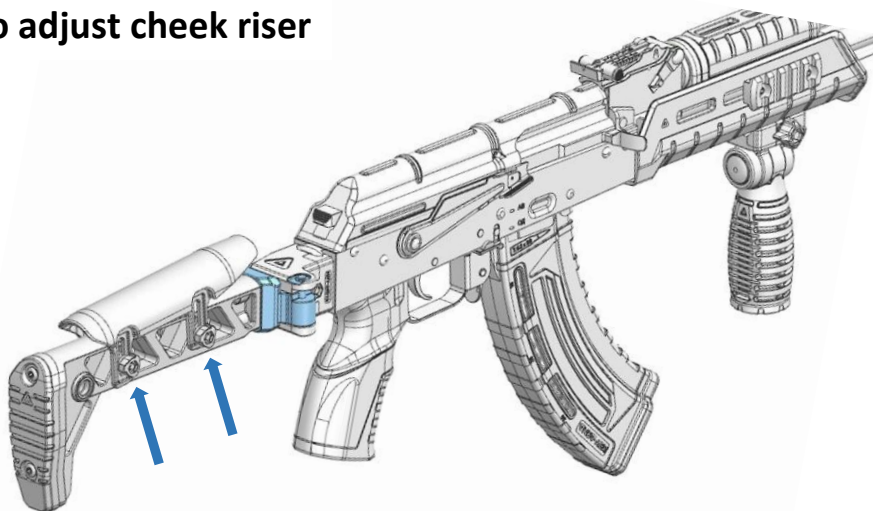

1. Adjust the cheek riser (2) using cheek riser adjustment knobs (3)

NEXUS-CP	Length	Width	Height
Dimensions	24,72 cm	5.38 cm	10.34 cm
Weight	320 gr		

TECHNICAL DIMENSIONS

